


## KSR label plate

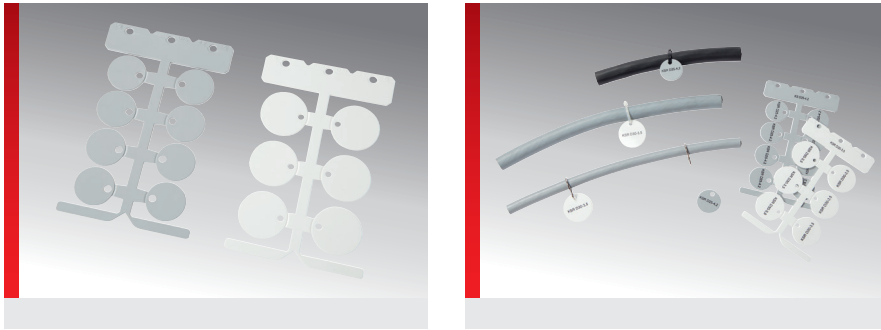

### PRODUCT INFORMATION

High-quality, halogen-free round label plate (PC circular blank) for subsequent labelling of cables, lines and conduits.

Fastened with either a cable tie or the S-hook.

### SPECIFICATIONS

- Polycarbonate (PC)
- 40 – 130 °C
- V0
- Single-line and multi-line labelling

HF

| Type                        | Order No. | Colour | RAL equiv. | Label size Ø mm | Fastening Hole Ø mm | Cable ties max. width mm | No. per Frame | Base plate | Software Type | Pack qty. |
|-----------------------------|-----------|--------|------------|-----------------|---------------------|--------------------------|---------------|------------|---------------|-----------|
| <b>Mounting hole 3.5 mm</b> |           |        |            |                 |                     |                          |               |            |               |           |
| KSR D20-3,5                 | 86411210  | White  | 9016       | 20.00           | 1x 3.5              | 2.90                     | 8             | GP3        | 447           | 120       |
| KSR D20-3,5                 | 86411222  | Grey   | 7038       | 20.00           | 1x 3.5              | 2.90                     | 8             | GP3        | 453           | 120       |
| KSR D25-3,5                 | 86411214  | White  | 9016       | 25.00           | 1x 3.5              | 2.90                     | 8             | GP3        | 449           | 120       |
| KSR D25-3,5                 | 86411226  | Grey   | 7038       | 25.00           | 1x 3.5              | 2.90                     | 8             | GP3        | 455           | 120       |
| KSR D30-3,5                 | 86411218  | White  | 9016       | 30.00           | 1x 3.5              | 2.90                     | 6             | GP3        | 451           | 90        |
| KSR D30-3,5                 | 86411230  | Grey   | 7038       | 30.00           | 1x 3.5              | 2.90                     | 6             | GP3        | 457           | 90        |
| <b>Mounting hole 4.2 mm</b> |           |        |            |                 |                     |                          |               |            |               |           |
| KSR D20-4,2                 | 86411212  | White  | 9016       | 20.00           | 1x 4.2              | 3.60                     | 8             | GP3        | 448           | 120       |
| KSR D20-4,2                 | 86411224  | Grey   | 7038       | 20.00           | 1x 4.2              | 3.60                     | 8             | GP3        | 454           | 120       |
| KSR D25-4,2                 | 86411216  | White  | 9016       | 25.00           | 1x 4.2              | 3.60                     | 8             | GP3        | 450           | 120       |
| KSR D25-4,2                 | 86411228  | Grey   | 7038       | 25.00           | 1x 4.2              | 3.60                     | 8             | GP3        | 456           | 120       |
| KSR D30-4,2                 | 86411220  | White  | 9016       | 30.00           | 1x 4.2              | 3.60                     | 6             | GP3        | 452           | 90        |
| KSR D30-4,2                 | 86411232  | Grey   | 7038       | 30.00           | 1x 4.2              | 3.60                     | 6             | GP3        | 458           | 90        |

### MATERIAL PROPERTIES

Polycarbonate (PC)

### THERMAL PROPERTIES

**Temperature / temperature range**  
-40 – 130 °C

## KSR label plate

### FIRE PROPERTIES



**Fire classification**  
V0

### TECHNICAL INFORMATION



**Halogen-free**  
DIN/VDE 0472, Part 815

### GENERAL TECHNICAL DATA



Single-line and multi-line labelling

### ASSEMBLY METHOD



Cable tie system with plate

### LABELLING TECHNOLOGY



Plotter



Laser devices



Inkjet

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.