
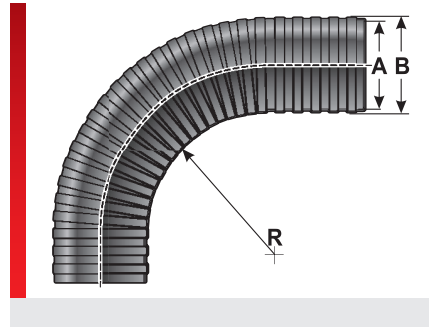


Type EWL-PAB

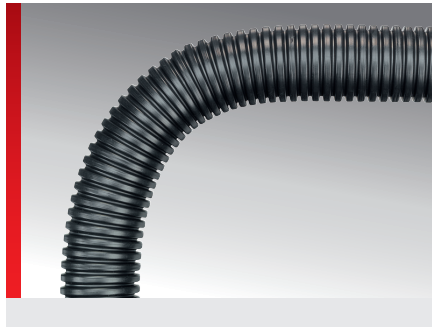

Cable protection conduit closed

PRODUCT INFORMATION

The EWL-PAB cable protection conduits are made of specially modified polyamide 6. The material is halogen, phosphor and cadmium-free.

The affordable EWL-PAB cable protection conduits are characterized by their excellent self-extinguishing properties and high crush and impact resistance.

For static applications involving low to medium mechanical loads.







Specification:


- EN 45545-2 3x HL3
- ECE 324 R 118 Annex 6+8


Applications:


- Plant engineering
- Mechanical engineering
- Vehicle engineering


SPECIFICATIONS


-  Mod. polyamide PA 6
-  According to IEC EN 61386
Crush resistance: > 1100 N
-  According to IEC EN 61386
Cycles: > 16000 ~
-  According to IEC EN 61386
Tier: 4
-  -40 – 120 °F Short periods 160 °F
-  acc. to UL94 V0 self-extinguishing














Article	Order No.	Color	A Ø mm	B Ø mm	R stat. mm	Weight lbs/100ft	MOQ m
EWL-PAB 06	83164152	Black	6.90	10.00	23.00	1.50	100
EWL-PAB M10/P07	83164154	Black	8.55	11.50	20.00	1.80	100
EWL-PAB M12/P09	83164156	Black	9.90	13.00	20.00	2.20	100
EWL-PAB-M16/P11	83164158	Black	12.20	15.70	25.00	2.90	100
EWL-PAB M16/P11, 500m ¹⁾	83164104	Black	12.20	15.70	25.00	2.90	500
EWL-PAB M18/P13	83164161	Black	14.20	18.40	40.00	4.00	100
EWL-PAB-M20/P16S	83164164	Black	16.50	20.90	45.00	5.40	100
EWL-PAB-M20/P16	83164162	Black	15.60	21.20	50.00	6.30	100
EWL-PAB M20/P16, 300m ¹⁾	83164105	Black	15.60	21.20	50.00	6.30	300
EWL-PAB-M25/P21S	83164167	Black	23.10	28.30	50.00	7.40	100
EWL-PAB-M25/P21	83164166	Black	22.10	28.50	55.00	9.60	100
EWL-PAB M25/P21, 250m ¹⁾	83164103	Black	22.10	28.50	55.00	9.60	250
EWL-PAB-M32/P29S	83164169	Black	28.50	34.50	60.00	10.60	50
EWL-PAB M32/P29S, 200m	83980335	Black	28.50	34.50	60.00	10.60	200
EWL-PAB-M32/P29	83164168	Black	27.80	34.50	70.00	10.80	50
EWL-PAB M32/P29, 200m ¹⁾	83164174	Black	27.80	34.50	70.00	10.80	200
EWL-PAB-M40/P36S	83164171	Black	36.20	42.10	75.00	12.80	25
EWL-PAB-M40/P36	83164170	Black	35.00	42.60	80.00	12.80	25
EWL-PAB-M50/P48S	83164173	Black	47.50	54.50	90.00	17.00	25
EWL-PAB M50/P48	83164172	Black	46.30	53.90	100.00	17.00	25
EWL-PAB 56	83164176	Black	56.30	70.00	160.00	30.00	25
EWL-PAB 70	83164175	Black	66.00	78.80	200.00	40.00	25

Type EWL-PAB

Article	Order No.	Color	A Ø mm	B Ø mm	R stat. mm	Weight lbs/100ft	MOQ m
EWL-PAB 06	83164178	Gray	6.90	10.00	23.00	1.50	100
EWL-PAB-M10/P07	83164180	Gray	8.55	11.50	20.00	1.80	100
EWL-PAB-M12/P09	83164182	Gray	9.90	13.00	20.00	2.20	100
EWL-PAB-M16/P11	83164184	Gray	12.20	15.70	25.00	2.90	100
EWL-PAB-M18/P13	83164186	Gray	14.20	18.40	40.00	4.00	100
EWL-PAB-M20/P16S	83164189	Gray	16.50	20.90	45.00	5.40	100
EWL-PAB-M20/P16	83164188	Gray	15.60	21.20	50.00	6.30	100
EWL-PAB-M25/P21S	83164191	Gray	23.10	28.30	50.00	7.40	100
EWL-PAB-M25/P21	83164190	Gray	22.10	28.50	55.00	9.60	100
EWL-PAB-M32/P29S	83164193	Gray	28.50	34.50	60.00	10.60	50
EWL-PAB-M32/P29	83164192	Gray	27.80	34.50	70.00	10.80	50
EWL-PAB-M40/P36S	83164195	Gray	36.20	42.10	75.00	12.80	25
EWL-PAB-M40/P36	83164194	Gray	35.00	42.60	80.00	12.80	25
EWL-PAB-M50/P48S	83164197	Gray	47.50	54.50	90.00	17.00	25
EWL-PAB-M50/P48	83164196	Gray	46.30	53.90	100.00	17.00	25

¹⁾ No stock goods, delivery time and minimum order quantities upon request

MATERIAL PROPERTIES



Mod. polyamide PA 6



High angle consistency

Crush resistance: > 1100 N; Testing method: According to IEC EN 61386; Test value: M25/P21



Flexural fatigue strength

Cycles: > 16000 ~; Testing method: According to IEC EN 61386; Test value: M25/P21



Impact strength

Tier: 4; Testing method: According to IEC EN 61386; Test value: M25/P21

THERMAL PROPERTIES



Temperature / temperature range

-40 – 120 °F Short periods 160 °F

FIRE BEHAVIOR



acc. to UL94 V0 self-extinguishing

TECHNICAL INFORMATION



Halogen-free

DIN 53474



UV resistant acc. to ISO 4892-2

Wir empfehlen die Farbe Schwarz

Type EWL-PAB

APPROVALS AND OPERATING PERMITS



Railway EU approval
EN 45545-2 R22/R23 3x HL3



cURus-approval



F&E/P3-ENr. 40-1

GENERAL INFORMATION



Made in Germany

All details given in our sales brochures and catalogs, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the products described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information regarding the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or in experiments, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_64487~20220201~890283~suv_ewlpab