
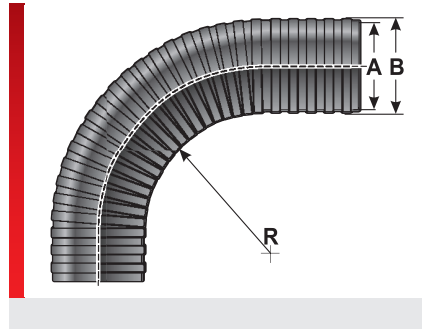


## EW-PATM (with metal braiding)

Tuburi flexibile infasurate in plasa sarma metalica otel zincat. Rezistenta UV calcare uzura.

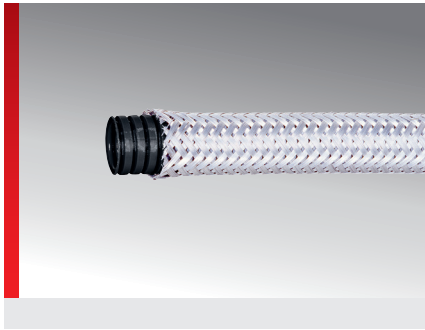

Cable protection conduit closed

### PRODUCT INFORMATION

The EW-PATM cable protection conduits are made of specially modified polyamide 6 and coated with a galvanised steel wire. The materials are halogen, phosphor and cadmium-free.

The EWL-PATM cable protection conduits feature good crush resistance, excellent thermal and mechanical protection, self-extinguish well and produce very low levels of

smoke gas. Therefore it is suitable for use in both rail transport systems and exposed layouts in building service applications. For static applications involving medium to high mechanical loads.

Specification:

- EN 45545-2 3x HL3

### SPECIFICATIONS

	In conformity with IEC EN 61386 Crush resistance: > 1300 N
	In conformity with IEC EN 61386 Cycles: > 1200 ~
	In conformity with IEC EN 61386 Tier: 3
	In conformity with IEC EN 61386 System tear-out strength: 500 N
	-40 – 120 °C transient / short term 160 °C
	acc. to UL94 V2 self-extinguishing S4



Type	Order No.	Colour	A Ø mm	B Ø mm	Weight kg/100m	Pack m
EW-PATM-M25/P21	83142016	Black	22.40	30.00	36.00	50
EW-PATM-M40/P36	83142020	Black	36.00	44.50	50.00	25



#### High angle consistency

Crush resistance: > 1300 N; Testing method: In conformity with IEC EN 61386; Test value: M25/P21



#### Flexural fatigue strength

Cycles: > 1200 ~; Testing method: In conformity with IEC EN 61386; Test value: M20/P16



#### Impact strength

Tier: 3; Testing method: In conformity with IEC EN 61386; Test value: M20/P16



#### System tear-out strength

System tear-out strength: 500 N; Testing method: In conformity with IEC EN 61386; Test value: M20/P16

### THERMAL PROPERTIES



#### Temperature / temperature range

-40 – 120 °C transient / short term 160 °C

## Type EW-PATM (with metal braiding)



### Fire classification

acc. to UL94 V2 self-extinguishing  
S4

### Smoke emission class

F2, NF F 16-101

### Flammability classification

I2, NF F 16-101

### Fire properties as per EN 45545-2

C.I.T. R22 / R23 HL3 = 00:52

LOI R22 / R23 HL3 = 33,1 %

Ds (max.) R22 / R23 HL3 = 101

## TECHNICAL INFORMATION



### Halogen-free

DIN 53474



### UV-resistant

## CONFORMITY



### RoHS (EC Directive 2011/65/EU)

## APPROVALS AND OPERATING PERMITS



### EU railway approval

EN 45545-2 R22/R23 3x HL3



### Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID\_82096~20181123~890283~suv\_ewpatm