


Type EWT-PP split-flex®

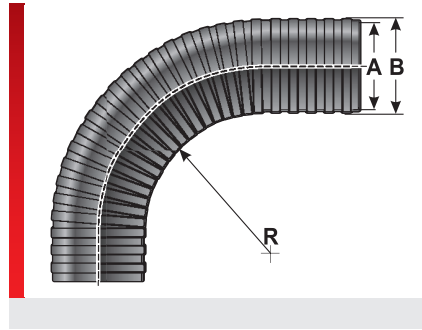

Cable protection conduit open

PRODUCT INFORMATION

The EWT-PP cable protection conduits are made of specially modified polypropylene. The material is phosphor and cadmium-free. For static applications involving light to medium mechanical loads. The EWT-PP cable protection conduits consist of a two-piece slotted corrugated tube

system and feature the following advantages:

- Corrugated tubes can be opened and closed at any time.
- Mounting of pre-assembled cables
- Retrofitting or repair in mechanical and plant engineering

SPECIFICATIONS

- Mod. Polypropylene
- In conformity with IEC EN 61386
Crush resistance: > 700 N
- 40 – 130 °C transient / short term
150 °C
- i.a.w. UL94 V2 self-extinguishing

HF
 UV
 RoHS
 Made in Germany

Type	Order No.	Colour	A Ø mm	B Ø mm	R stat. mm	R dyn. mm	Weight kg/100m	Pack m
Standard corrugation								
EWT-PP-M10/P7	83204250	Black	5.70	11.50	55.00	190.00	3.20	50
EWT-PP-M12/P9	83204252	Black	7.90	12.90	60.00	210.00	4.00	50
EWT-PP-M16/P11	83204254	Black	10.40	16.00	75.00	260.00	5.60	50
EWT-PP-M20/P16	83204256	Black	13.90	20.60	85.00	295.00	8.80	50
EWT-PP-M25/P21	83204258	Black	20.60	28.00	130.00	455.00	12.20	50
EWT-PP-M32/P29	83204260	Black	25.60	34.00	140.00	490.00	16.50	25
EWT-PP-M40/P36	83204262	Black	31.80	43.00	160.00	560.00	26.60	25
EWT-PP-M50/P48	83204264	Black	42.50	53.00	170.00	595.00	32.20	25
EWT-PP-70 Jumbo	83261062	Black	60.50	78.00	190.00	655.00	44.00	10

MATERIAL PROPERTIES



Mod. Polypropylene



High angle consistency

Crush resistance: > 700 N; Testing method: In conformity with IEC EN 61386; Test value: M25/P21

THERMAL PROPERTIES



Temperature / temperature range

-40 – 130 °C transient / short term 150 °C

FIRE BEHAVIOUR



Fire classification

i.a.w. UL94 V2 self-extinguishing

Type EWT-PP split-flex®

TECHNICAL INFORMATION

HF Halogen-free
DIN 53474

UV UV-resistant
Wir empfehlen die Farbe Schwarz

CONFORMITY

RoHS RoHS (EC Directive 2011/65/EC)

Made in Germany Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_64761~20180712~890283~suv_ewtpp