


## VW 90° (plastic thread)

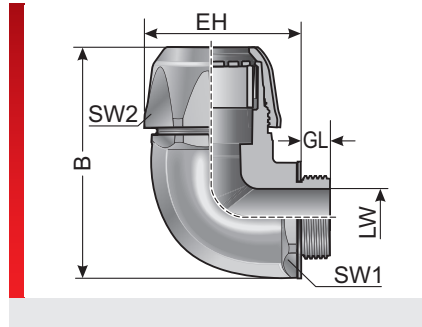

m-top conduit fitting

### PRODUCT INFORMATION

The VW 90° conduit fittings are made of specially modified polyamide 6 and thermo-plastic elastomer. The materials are halogen, phosphor and cadmium-free.

The VW 90° conduit fittings feature the following advantages:

- Quick assembly, insert conduit, screw upper part tight, done
- No parts can get lost, delivered completely assembled

- Resistant to vibration due to lockable cap nut
- Clamping along entire circumference, ensuring maximum tensile strength.
- High level of tightness at IP 68/69K to 6 bar without any add-on components to EN 60529

Specification:

- EN 45545-2 3x HL3

### SPECIFICATIONS

	Fitting: Mod. polyamide PA 6 Connecting thread Mod. polyamide PA 6
	-40 – 110 °C transient / short term 140 °C
	IP 68 up to 6 bar (IP 69K)
	i.a.w. UL94 V0 self-extinguishing



Type	Order No.	Colour	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1 / 2 mm	Pack qty.
<b>Metric plastic thread</b>										
VW 90 M12-K <sup>1)</sup>	83515052	Black	M12x1.5	M12/P09	29.00	12.00	7.20	45.00	21.00 / 21.00	50
VW 90 M16-K <sup>1)</sup>	83515054	Black	M16x1,5	M16/P11	35.00	12.00	10.50	55.00	27.00 / 27.00	50
VW 90 M20-K <sup>1)</sup>	83515056	Black	M20x1.5	M20/P16	45.00	13.00	14.70	67.00	34.00 / 34.00	50
VW 90 M25-K <sup>1)</sup>	83515058	Black	M25x1.5	M25/P21	55.00	13.00	18.70	78.00	41.00 / 41.00	25
VW 90 M32-K <sup>1)</sup>	83515060	Black	M32x1.5	M32/P29	65.00	15.00	25.50	92.00	50.00 / 50.00	25
VW 90 M40-K <sup>2)</sup>	83515062	Black	M40x1.5	M40/P36	75.00	17.00	33.00	109.00	60.00 / 60.00	25
VW 90 M50-K <sup>1)</sup>	83515064	Black	M50x1.5	M50/P48	93.00	17.00	42.00	134.00	75.00 / 75.00	10
<b>Pg plastic threading</b>										
VW 90 P9-K <sup>1)</sup>	83515452	Black	Pg 09	M12/P09	29.00	12.00	7.20	45.00	21.00 / 21.00	50
VW 90 P11-K <sup>1)</sup>	83515454	Black	Pg 11	M16/P11	35.00	12.00	10.50	55.00	27.00 / 27.00	50
VW 90 P16-K <sup>1)</sup>	83515456	Black	Pg 16	M20/P16	45.00	13.00	14.70	67.00	34.00 / 34.00	50
VW 90 P21-K <sup>1)</sup>	83515458	Black	Pg 21	M25/P21	44.00	13.00	18.70	78.00	41.00 / 41.00	25
VW 90 P29-K <sup>1)</sup>	83515460	Black	Pg 29	M32/P29	65.00	14.00	25.50	92.00	50.00 / 50.00	25
VW 90 P36-K <sup>2)</sup>	83515462	Black	Pg 36	M40/P36	75.00	17.00	33.00	109.00	60.00 / 60.00	25
VW 90 P48-K <sup>1)</sup>	83515464	Black	Pg 48	M50/P48	93.00	17.00	42.00	134.00	75.00 / 75.00	10

## Type VW 90° (plastic thread)

Type	Order No.	Colour	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1 / 2 mm	Pack qty.
VW 90 P9-K <sup>1)</sup>	83515412	Grey	Pg 09	M12/P09	29.00	12.00	7.20	45.00	21.00 / 21.00	50
VW 90 P11-K <sup>1)</sup>	83515414	Grey	Pg 11	M16/P11	35.00	12.00	10.50	55.00	27.00 / 27.00	50
VW 90 P16-K <sup>1)</sup>	83515416	Grey	Pg 16	M20/P16	45.00	13.00	14.70	67.00	34.00 / 34.00	50
VW 90 P21-K <sup>1)</sup>	83515418	Grey	Pg 21	M25/P21	44.00	13.00	18.70	78.00	41.00 / 41.00	25
VW 90 P29-K <sup>1)</sup>	83515420	Grey	Pg 29	M32/P29	65.00	14.00	25.50	92.00	50.00 / 50.00	25
VW 90 P36-K <sup>2)</sup>	83515422	Grey	Pg 36	M40/P36	75.00	17.00	33.00	109.00	60.00 / 60.00	25
VW 90 P48-K <sup>1)</sup>	83515424	Grey	Pg 48	M50/P48	93.00	17.00	42.00	134.00	60.00 / 60.00	10
<b>NPT plastic threading</b>										
VW 90 N 3/8"-K <sup>1)</sup>	83515850	Black	3/8"	M16/P11	35.00	12.00	10.50	55.00	25.00 / 25.00	50
VW 90 N 1/2"-K <sup>1)</sup>	83515852	Black	1/2"	M20/P16	45.00	13.00	14.60	67.00	34.00 / 34.00	50
VW 90 N 3/4"-K <sup>1)</sup>	83515854	Black	3/4"	M25/P21	55.00	14.00	18.70	78.00	41.00 / 41.00	25
VW 90 N 1"-K <sup>1)</sup>	83515856	Black	1"	M32/P29	65.00	14.00	25.60	92.00	50.00 / 50.00	25
VW 90 N 1 1/4 -K <sup>2)</sup>	83515858	Black	1 1/4"	M40/P36	75.00	18.00	33.00	109.00	60.00 / 60.00	25
VW 90 N 2"-K <sup>1)</sup>	83515860	Black	2"	M50/P48	93.00	18.00	42.00	134.00	75.00 / 75.00	10
VW 90 N 3/8"-K <sup>1)</sup>	83515810	Grey	3/8"	M16/P11	35.00	12.00	10.50	55.00	25.00 / 25.00	50
VW 90 N 1/2"-K <sup>1)</sup>	83515812	Grey	1/2"	M20/P16	45.00	13.00	14.60	67.00	34.00 / 34.00	50
No stock goods, delivery time and minimum order quantities upon request										
VW 90 N 3/4"-K <sup>1)</sup>	83515814	Grey	3/4"	M25/P21	55.00	14.00	18.70	78.00	41.00 / 41.00	25
VW 90 N 1"-K <sup>1)</sup>	83515816	Grey	1"	M32/P29	65.00	14.00	25.60	92.00	50.00 / 50.00	25
VW 90 N 1 1/4 -K <sup>2)</sup>	83515818	Grey	1 1/4"	M40/P36	75.00	18.00	33.00	109.00	60.00 / 60.00	25
VW 90 N 2"-K <sup>1)</sup>	83515820	Grey	2"	M50/P48	93.00	18.00	42.00	134.00	75.00 / 75.00	10
<sup>1)</sup> With cURus- approval										
<sup>2)</sup> With CSA- and cURus- approval										

### MATERIAL PROPERTIES



Fitting: Mod. polyamide PA 6  
Connecting thread Mod. polyamide PA 6

### THERMAL PROPERTIES



**Temperature / temperature range**  
-40 – 110 °C transient / short term 140 °C

### MECHANICAL PROPERTIES



**Protection class**  
IP 68 up to 6 bar (IP 69K)

## Type VW 90° (plastic thread)

### FIRE BEHAVIOUR



**Fire classification**  
i.a.w. UL94 V0 self-extinguishing

**Smoke emission class**  
SR2 DIN 54837 / 5510-2

**Flammability classification**  
S4 DIN 5510-2

**Fire properties as per EN 45545-2**  
C.I.T. R22 / R23 HL3 = 0.43  
LOI R22 / R23 HL3 = 33,8 %  
Ds (max.) R22 / R23 HL3 = 63

### TECHNICAL INFORMATION



**Halogen-free**  
DIN 53474

### CONFORMITY



**RoHS (EC Directive 2011/65/EC)**

### APPROVALS AND OPERATING PERMITS



**EU railway approval**  
EN 45545-2 R22/R23 3x HL3



**CSA approval**



**cURus approval**



**Made in Germany**

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID\_65003~20180719~890283~suv\_vw\_90\_ku